


## PCI ISDN Card

The BIPAC-PCI supports many standard and enhanced features that allow you to make full use of your application software. The functions are as followings:

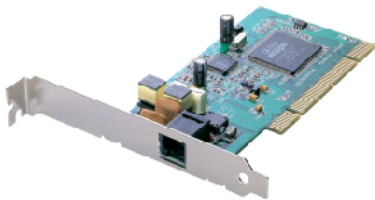

▲ BIPAC-PCI V.3.0

- High speed 128Kbps (ML-PPP) for Internet access
- Plug and Play for Windows 95, Windows 98 and NT
- Very easy to Install
- Single chip ISDN card, cost effective solution
- Supports both CAPI 2.0 and NDIS WAN miniport drive
- G3 Fax send/receive 14,400 bps
- Complete set of protocols:
  - PPP and Multilink PPP
  - X.75, T.70NL, ISO 8208 and Eurofile Transfer
  - V.110 and V.120
  - HDLC Transparent
  - Bit Transparent
- Com-Port simulation for existing MODEM software
- RVS-COM software bundled(multilingual supported)
- User friendly GUI based Utility and Diagnostic Program

### Feature & Specification

#### ▶ ISDN Standards

- 1xRJ45 connector
- Basic Rate Access(2B+D)
- S/T-Interface
- Comply with CTR-(TBR-3)
- Protocol:ETS 300 125, ETS 300 102-1, ETS 300 102-2

#### ▶ ISDN Network & Switch Compatibility

- E-DSSI(Euro-ISDN)

#### ▶ B-Channel Protocol

- PPP and Multilink Protocol(MP)
- Eurofile Transfer
- X.75
- t.70NL
- X.75 transparent
- HDLC transparent
- V.120
- V.110
- Bit tr

#### ▶ Operating System Support

- Win 95/98/NT2000/ME
- Linux

#### ▶ Dimension

- 95mmx50mm



\*Specifications are subject to change without notice.

**Billion Electric Co., Ltd.**

8F, No.192, Sec.2, Chung Hsing Road,  
Hsin Tien City, Taipei Hsien, Taiwan

TEL : +886-2-2914-5665

FAX : +886-2-2918-6731,+886-2-2918-2895

E-mail : sales@billion.com

[www.billion.com](http://www.billion.com)

Powering communications  
with **Security**