


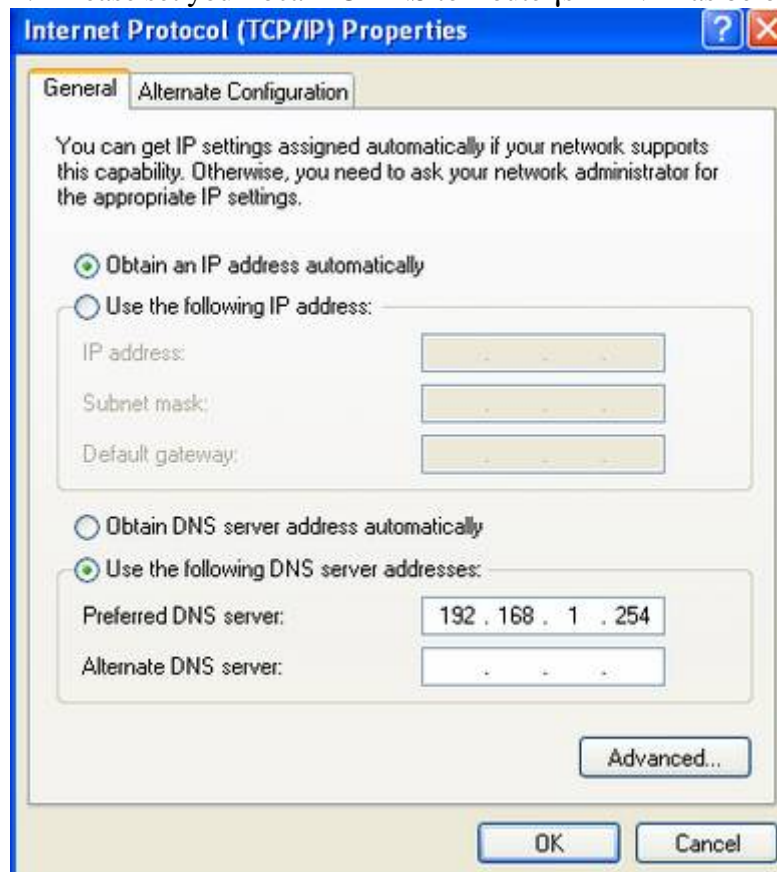
Q:How to use Domain Name to access our Web UI at LAN site?

A:

1. Please enter Host name on status.

Host Name	
Device Host Name	
Host Name	<input type="text" value="my.home.gateway"/>
<p>( The Host Name cannot be used with one word only. There are two words should be connected with a '.' at least.)</p> <p>Example: Host Name: homegateway ==&gt; Incorrect Host Name: home.gateway or my.home.gateway ==&gt; Correct</p>	
<input type="button" value="Apply"/>	

2. Please set your local PC DNS to Router's LAN IP as below:



The image shows the 'Internet Protocol (TCP/IP) Properties' dialog box. The 'General' tab is selected. It contains instructions about automatic IP assignment. Under 'Use the following IP address', the 'Preferred DNS server' is set to '192.168.1.254'. The 'Alternate DNS server' is empty. The 'Advanced...' button is at the bottom right. 'OK' and 'Cancel' buttons are at the very bottom.

3. Open Command Prompt and ping test as below:

```

C:\Documents and Settings\BobLu>ping 192.168.1.254

Pinging 192.168.1.254 with 32 bytes of data:

Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\BobLu>ping my.home.gateway

Pinging my.home.gateway [192.168.1.254] with 32 bytes of data:

Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128
Reply from 192.168.1.254: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.254:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

```

4. Then you could use <http://my.home.gateway> to access our Web UI.

Status	
Device Information	
Model Name	BiPAC 7402VGO
Host Name	my.home.gateway
System Up-Time	00:10:42s
Current Time	Thu, 01 Jan 1970 - 00:10:42 <span>Sync Now</span>
Hardware Version	Argon 432 ADSL-AWG/VQ v1.00
Software Version	5.52f
MAC Address	00:04:ED:FF:FA:F4
Home URL	<a href="#">Billion Electric Co., Ltd</a>